

MC110


300 dpi

Resolution

Distributed

Issuance

Printing ID cards has never been so easy

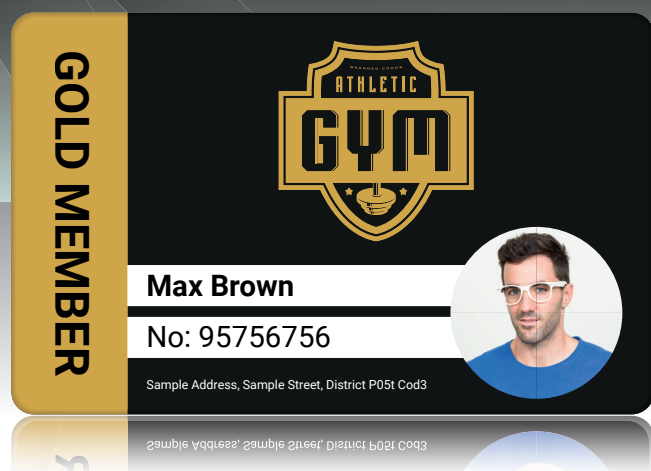

Matica's MC110 has been designed to simplify card issuance, thanks to its user friendly, **'plug & print'** operation.

The MC110 is the ideal solution for establishing an in-house ID card issuance program and is widely used by membership organisations and small to medium sized businesses. Based on Matica's robust and reliable print engine, the MC110 prints vibrant, colorful cards every time.


Upgradable from single to dual-sided, the MC110 is also available with a contact/contactless encoder for the issuance of smart cards for access and entry control.

Print type Dye sublimation	Print mode 1 or 2 sided	150 cph Full color	700 cph Monochrome
Input capacity x100	Output capacity 30	Rewritable ABC	Easy to use Plug & print
Printer drivers Windows® / Mac	Encoding options)	Free software CARDEXCHANGE® PRODUCER Lite edition	Warranty 2 YEARS



MC110 delivers...

- ▶ High quality 300dpi printing
- ▶ Up to 150 color cards per hour
- ▶ Single to dual-sided upgrade
- ▶ Robust, reliable build quality
- ▶ Smart card encoding option
- ▶ 2 years warranty

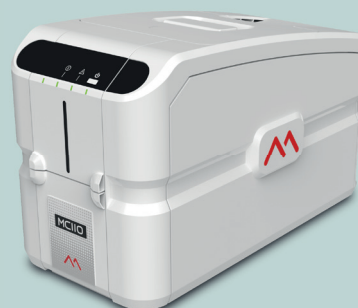

Ideal for...

- ▶ Mid to low volume card issuance

MC110

Printer specifications

Print technology

Dye-sublimation, direct-to-card
Rewritable

Print resolution

300 dpi

Print area

53.98 x 85.6mm / 3.370" x 2.125" (CR-80 cards)

Print speed

- 150 cph (YMCKO single-side)
- 700 cph (monochrome printing)

Print mode

Single-sided / optional dual-sided

Printer memory

128 Mb

Communications interface

USB 2.0

Easy to use, plug and print operation

- 4 x LED status indicators
- Full front operation
- Drop in ribbon cassette with easy handling
- Automatic ribbon identification and setting
- Easy reach power button
- Easy maintenance access

Printer security

Support for Kensington® security lock

Printer dimensions (HxWxD)

256 x 202 x 405 mm / 10.6" x 7.9" x 15.9"

Weight

5.9 kg, 13 lb

Power supply

- 220-240V/110-115V, 50-60 Hz
- Standby mode and reduced power consumption

Operating environment

- Temperature: 15°C to 40°C, 59°F to 104°F
- Humidity: 20% - 65% (non-condensing)

Storage conditions

- Temperature: 5°C to 70°C, 23°F to 158°F
- Humidity: 20% to 70% (non-condensing)

Sound (ISO 7779)

Sound pressure less than 48dB (A)

Certifications

RoHs, CE, FCC, CQC, UL, WEEE, Proposition 65 (California, USA), Radio Equipment Directive (RED) (2014/53/EU)

Warranty

2 years (subject to the use of chromXpert® ribbons)

Card specifications

Input hopper capacity

100 cards (0.76 mm / 30 mil thickness)

Output hopper capacity

30 cards (front)

Card thickness

- 0.25 mm - 1.25 mm / 10 mil - 50 mil
- Gauge adjustment

Card types

CR-80 PVC, PVC-C

Software specifications

XPS printer driver

Windows® (32/64bit) 7, 8.1, 10, 11, Server 2012, 2016, 2019, 2022

MacOS

MacOS: from Mavericks 10.9 to Ventura 13.1

Options

Smart card / contactless encoding

- Contact PC/SC, EMV compliant
- Smart contact station: ISO 7816-2
- ISO14443A, B, ISO15693, MIFARE®, DESFire®, HID iClass®

Dual-side activation kit PR10300016



Consumables chromXpert

- To ensure print quality and card durability, printhead lifespan and overall printer reliability, use chromXpert ribbons only.
- Supply cores and cassettes are recyclable. Packaging is recycled.

ChromXpert™ ribbon program	Part No.
• YMCKO (250 prints)	PR20305301
• YMCKO-K (200 prints)	PR20319302
• ymc-KO (400 prints, half panel)	PR20319303
• KO (600 prints)	PR20305304
• Monochrome K (up to 2000 prints)	PR20314305
• Monochrome: White, Red, Green, Blue (up to 1000 prints)	Also available
Cleaning kit	PR20309610



Global offices

Europe: Switzerland HQ, Italy

Asia: Malaysia

USA: South Carolina HQ, Minneapolis

Middle East: Dubai



Authorized reseller / System integrator

MC110 Datasheet A4 UK V13
Data subject to change without notice. All trademarks stated are the property of their respective owners.